

# LED Lamps

## Eco LED BR Lamps



**LED BR20  
E26 Base**  
LED320  
6.5W • 27K • 460lm



**LED BR30  
E26 Base**  
LED330  
9W • 27K • 650lm



**LED BR40  
E26 Base**  
LED340  
13W • 27K • 1,050lm

## Applications

Our general purpose household light bulbs will conveniently replace incandescent or compact fluorescent bulbs.

## Specification Features

|                     |  |
|---------------------|--|
| <b>ETL Listing</b>  | Damp Location                                |
| <b>Energy Star</b>  | Approved                                     |
| <b>Uses</b>         | Down lighting, display or accent application |
| <b>Beam Angle</b>   | 110°   |
| <b>Start</b>        | Instant on to full brightness                |
| <b>Dimmable</b>     | Smooth, uniform dimming                      |
| <b>Light Source</b> | LED Reflector Flood                          |
| <b>Rating</b>       | 15,000 hrs.                                  |

DC Supply defines damp locations as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.

### Ordering Example:

LED330-9W-27K



| Prefix | Watts | Kelvin | Bulb Shape | Base | Lumens | Beam Angle | MOL   | Wattage Equivalent | Pkg Qty |
|--------|-------|--------|------------|------|--------|------------|-------|--------------------|---------|
| LED320 | 6.5W  | 27K    | BR20       | E26  | 460    | 110°       | 3.8"  | 45W                | 1/24    |
| LED330 | 9W    | 27K    | BR30       | E26  | 650    | 110°       | 5"    | 65W                | 1/24    |
| LED340 | 13W   | 27K    | BR40       | E26  | 1,050  | 110°       | 6.46" | 85W                | 1/12    |

# LED Lamps

## LED Commercial Lamps



### Applications

Our general purpose household light bulbs will conveniently replace incandescent or compact fluorescent bulbs.

### Specification Features

|                     |  |
|---------------------|--|
| <b>ETL Listing</b>  | Damp Location  |
| <b>Type</b>         | PLC  |
| <b>Uses</b>         | Direct replacement for 60-75 watt incandescent or CFL bulbs. |
| <b>Beam Angle</b>   | 130°   |
| <b>Direction</b>    | Omni-directional with full light pattern                     |
| <b>Dimmable</b>     | Non-dimmable   |
| <b>Light Source</b> | LED  |
| <b>Rating</b>       | 50,000 hrs.  |



#### LED PLC E26 Base

LED010  
5W • 28K • 450lm

LED012  
5W • 41K • 450lm



#### LED PLC GU24 Base

LED005  
5W • 28K • 450lm

LED006  
5W • 41K • 450lm

LED007  
7W • 28K • 700lm

LED008  
7W • 41K • 700lm



All lamp types swivel 270°

DC Supply defines damp locations as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.

#### Ordering Example:

LED007-7W-28K

| Prefix | Watts | Kelvin | Bulb Shape | Base           | Lumens | Beam Angle | Dimensions    | Wattage Equivalent |
|--------|-------|--------|------------|----------------|--------|------------|---------------|--------------------|
| LED005 | 5W    | 28K    | PLC        | GU24           | 450    | 130°       | 5.38" x 1.10" | 60W                |
| LED006 | 5W    | 41K    | PLC        | GU24           | 450    | 130°       | 5.38" x 1.10" | 60W                |
| LED007 | 7W    | 28K    | PLC        | GU24           | 700    | 130°       | 6.40" x 1.38" | 75W                |
| LED008 | 7W    | 41K    | PLC        | GU24           | 700    | 130°       | 6.40" x 1.38" | 75W                |
| LED010 | 5W    | 28K    | PLC        | E26            | 450    | 130°       | 5.38" x 1.10" | 60W                |
| LED012 | 5W    | 41K    | PLC        | E26            | 450    | 130°       | 5.38" x 1.10" | 60W                |
| LED014 | 5W    | 28K    | PLC        | G23/GX23 2-Pin | 450    | 130°       | 5.79" x 1.10" | 60W                |
| LED016 | 5W    | 41K    | PLC        | G23/GX23 2-Pin | 450    | 130°       | 5.79" x 1.10" | 60W                |
| LED018 | 5W    | 28K    | PLC        | G24/GX24 4-Pin | 450    | 130°       | 5.79" x 1.10" | 60W                |
| LED020 | 5W    | 41K    | PLC        | G24/GX24 4-Pin | 450    | 130°       | 5.79" x 1.10" | 60W                |



#### LED PLC G23/GX24 Base

LED005  
5W • 28K • 450lm

LED006  
5W • 41K • 450lm

LED007  
7W • 28K • 700lm

LED008  
7W • 41K • 700lm



# LED Lamps

## LED Decorative Lamps



**LED G26  
E26 Base**  
LED064  
7W • 27K • 500lm

## Applications

Our general purpose household light bulbs will conveniently replace incandescent or compact fluorescent bulbs.

## Specification Features

|                     |  |
|---------------------|--|
| <b>ETL Listing</b>  | Damp Location                                |
| <b>Energy Star</b>  | Approved                                     |
| <b>Uses</b>         | Down lighting, display or accent application |
| <b>Beam Angle</b>   | 110°   |
| <b>Start</b>        | Instant on to full brightness                |
| <b>Dimmable</b>     | Smooth, uniform dimming                      |
| <b>Light Source</b> | LED Reflector Flood                          |
| <b>Rating</b>       | 15,000 hrs.                                  |



**LED MR16  
GU10 Base**  
LED066  
6W • 30K • 450lm



**LED MR16  
GU5.3 Base**  
LED068  
6W • 30K • 400lm



**LED B11 Flame Tip  
E12 Base**  
LED060  
5W • 27K • 350lm



**LED B11 Flame Tip  
E26 Base**  
LED062  
5W • 27K • 350lm

DC Supply defines damp locations as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.

### Ordering Example:

LED064-7W-27K



| Prefix | Watts | Kelvin | Bulb Shape    | Base  | Lumens | Beam Angle | MOL   | Wattage Equivalent | Pkg Qty |
|--------|-------|--------|---------------|-------|--------|------------|-------|--------------------|---------|
| LED060 | 5W    | 27K    | B11 Flame Tip | E26   | 350    | 40°        | 3.78" | 40W                | 1/24    |
| LED062 | 5W    | 27K    | B11 Flame Tip | E26   | 350    | 40°        | 3.78" | 40W                | 1/24    |
| LED064 | 7W    | 27K    | G25 Globe     | E26   | 500    | 110°       | 4.25" | 50W                | 1/12    |
| LED066 | 6W    | 30K    | MR16          | GU10  | 450    | 40°        | 2"    | 50W                | 1/12    |
| LED068 | 6W    | 30K    | MR16          | GU5.3 | 400    | 40°        | 2"    | 50W                | 1/12    |

# LED Lamps

## LED Filament Lamps



### Specification Features

|                     |                               |
|---------------------|-------------------------------|
| <b>ETL Listing</b>  | Damp Location                 |
| <b>Energy Star</b>  | Approved                      |
| <b>Application</b>  | Suitable for Indoor & Outdoor |
| <b>CRI</b>          | 80                            |
| <b>Driver</b>       | Built in driver system        |
| <b>Dimmable</b>     | Smooth dimming                |
| <b>Light Source</b> | LED Filament                  |
| <b>Rating</b>       | 15,000 hrs.                   |



**LED052**  
7W • 27K • 800lm  
E26 Base



**LED054**  
12W • 27K • 1,100lm  
E26 Base



**LED056**  
4W • 27K • 420lm  
E26 Base



**LED136**  
7W • 27K • 800lm  
E26 Base



**LED120**  
4W • 27K • 420lm  
E26 Base



**LED058**  
7W • 27K • 800lm  
E26 Base



**LED024**  
3W • 27K • 310lm  
E26 Base



**LED020**  
2.5W • 27K • 230lm  
E12 Base



**LED026**  
3W • 27K • 310lm  
E26 Base



**LED022**  
2.5W • 27K • 230lm  
E12 Base

DC Supply defines damp locations as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.

### Ordering Example:

LED102-7W-27K



Intertek



| Prefix | Watts | Kelvin | Bulb Shape    | Base | Lumens | Beam Angle | MOL   | Wattage Equivalent | Pkg Qty |
|--------|-------|--------|---------------|------|--------|------------|-------|--------------------|---------|
| LED020 | 2.5W  | 27K    | B11 Torpedo   | E12  | 230    | 330°       | 3.65" | 40W                | 1/24    |
| LED022 | 2.5W  | 27K    | B11 Flame Tip | E12  | 230    | 330°       | 4.76" | 40W                | 1/24    |
| LED024 | 3W    | 27K    | B11 Torpedo   | E26  | 310    | 330°       | 3.65" | 50W                | 1/12    |
| LED026 | 3W    | 27K    | B11 Flame Tip | E26  | 310    | 330°       | 4.76" | 50W                | 1/12    |
| LED052 | 7W    | 27K    | A19           | E26  | 800    | 330°       | 4.02" | 60W                | 1/12    |
| LED054 | 12W   | 27K    | A21           | E26  | 1100   | 330°       | 5.27" | 75W                | 1/24    |
| LED056 | 4W    | 27K    | T10           | E26  | 420    | 330°       | 5.12" | 40W                | 1/12    |
| LED058 | 7W    | 27K    | ST19          | E26  | 800    | 330°       | 5.51" | 60W                | 1/12    |
| LED120 | 4W    | 27K    | G25           | E26  | 420    | 330°       | 4.13" | 40W                | 1/24    |
| LED136 | 7W    | 27K    | G40           | E26  | 800    | 330°       | 6.61" | 60W                | 1/12    |

# LED Lamps

## LED Fluorescent Tube Replacements



### Applications

Our general purpose household light bulbs will conveniently replace fluorescent tubes.

### Specification Features

|                     |  |
|---------------------|--|
| <b>ETL Listing</b>  | Damp Location                            |
| <b>Type</b>         | T8 - Tube                                |
| <b>Uses</b>         | Direct replacement for fluorescent tubes |
| <b>Direction</b>    | Omni-directional with full light pattern |
| <b>Dimmable</b>     | Non-dimmable                             |
| <b>Light Source</b> | LED                                      |
| <b>Rating</b>       | 50,000 hrs.                              |



#### LED T8 Tube G13 Base

LEDT800  
24" • 9W • 30K • 900lm

LEDT801  
48" • 18W • 30K • 1,800lm

LEDT802  
24" • 9W • 40K • 900lm

LEDT803  
24" • 9W • 50K • 900lm

LEDT804  
48" • 18W • 40K • 1,800lm

LEDT805  
48" • 18W • 50K • 1,800lm

DC Supply defines damp locations as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.

#### Ordering Example:

LED070-2W-30K



| Prefix  | Watts | Kelvin | Bulb Shape | Base | Lumens | Dimensions | Wattage Equivalent |
|---------|-------|--------|------------|------|--------|------------|--------------------|
| LEDT800 | 9W    | 30K    | T8 Tube    | G13  | 900    | 24" x 1.1" | 17W                |
| LEDT801 | 18W   | 30K    | T8 Tube    | G13  | 1,800  | 48" x 1.1" | 32W                |
| LEDT802 | 9W    | 40K    | T8 Tube    | G13  | 900    | 24" x 1.1" | 17W                |
| LEDT803 | 18W   | 50K    | T8 Tube    | G13  | 900    | 24" x 1.1" | 17W                |
| LEDT804 | 9W    | 40K    | T8 Tube    | G13  | 1,800  | 48" x 1.1" | 32W                |
| LEDT805 | 18W   | 50K    | T8 Tube    | G13  | 1,800  | 48" x 1.1" | 32W                |

# LED Lamps

## Eco LED General Household Lamps



### LED A19 E26 Base

LEDA102  
LEDA104  
LEDA110  
LEDA112



### LED A19 E26 Base

LEDA106  
LEDA108  
LEDA114  
LEDA116

## Applications

Our general purpose household light bulbs will conveniently replace incandescent or compact fluorescent bulbs.

## Specification Features

|                    |   |
|--------------------|---|
| <b>ETL Listing</b> | Damp Location   |
| <b>Type</b>        | Down Lighting   |
| <b>Application</b> | Approved for totally enclosed fixtures                                    |
| <b>Use</b>         | Direct replacement for 40-60 watt incandescent bulbs, use only 7-10 watt. |
| <b>Beam Angle</b>  | 240°  |
| <b>Direction</b>   | Omni-directional with full light pattern.                                 |
| <b>Dimmable</b>    | Non-dimmable  |
| <b>Rating</b>      | 15,000 hrs.   |



### LED A15 E26 Base

LED210  
LED214

DC Supply defines damp locations as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.

### Ordering Example:

LEDA102-5W-27K



Intertek



| Prefix  | Watts | Kelvin | Bulb Shape | Base | Lumens | Beam Angle | MOL   | Wattage Equivalent | Pkg Qty |
|---------|-------|--------|------------|------|--------|------------|-------|--------------------|---------|
| LEDA102 | 5W    | 27K    | A19        | E26  | 450    | 240°       | 4.25" | 40W                | 1/4     |
| LEDA104 | 5W    | 41K    | A19        | E26  | 450    | 240°       | 4.25" | 40W                | 1/4     |
| LEDA106 | 5W    | 27K    | A19        | GU24 | 450    | 240°       | 4.25" | 40W                | 1/4     |
| LEDA108 | 5W    | 41K    | A19        | GU24 | 450    | 240°       | 4.25" | 40W                | 1/4     |
| LEDA110 | 9W    | 27K    | A19        | E26  | 800    | 240°       | 4.25" | 60W                | 1/4     |
| LEDA112 | 9W    | 41K    | A19        | E26  | 800    | 240°       | 4.25" | 60W                | 1/4     |
| LEDA114 | 9W    | 27K    | A19        | GU24 | 800    | 240°       | 4.25" | 60W                | 1/4     |
| LEDA116 | 9W    | 41K    | A19        | GU24 | 800    | 240°       | 4.25" | 60W                | 1/4     |
| LED210  | 5.5W  | 27K    | A15        | E26  | 600    | 240°       | 3.48" | 40W                | 1/4     |
| LED214  | 5.5W  | 41K    | A15        | E26  | 600    | 240°       | 3.48" | 40W                | 1/4     |

# LED Lamps

Eco LED Par Lamps



## Applications

Our general purpose household light bulbs will conveniently replace incandescent or compact fluorescent bulbs.

## Specification Features

|                     |  |
|---------------------|--|
| <b>ETL Listing</b>  | Damp Location                                |
| <b>Energy Star</b>  | Approved                                     |
| <b>Uses</b>         | Down lighting, display or accent application |
| <b>Beam Angle</b>   | 40° Uniform Beam Focus                       |
| <b>Start</b>        | Instant on to full brightness                |
| <b>Dimmable</b>     | Full dimming. Long life.                     |
| <b>Light Source</b> | LED Par Lamps 120v                           |
| <b>Rating</b>       | 15,000 hrs.                                  |

**LED PAR20  
E26 Base**  
LED420  
7W • 27K • 460lm



**LED PAR30-SN  
E26 Base**  
LED430  
11.5W • 27K • 850lm



**LED PAR30-LN  
E26 Base**  
LED432  
11.5W • 27K • 850lm



**LED PAR40  
E26 Base**  
LED438  
13W • 27K • 1,050lm  
  
LED440  
17W • 27K • 1,300lm



DC Supply defines damp locations as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.

**Ordering Example:**  
LED420-7W-27K



| Prefix    | Watts | Kelvin | Bulb Shape       | Base | Lumens | Beam Angle | MOL   | Wattage Equivalent | Pkg Qty |
|-----------|-------|--------|------------------|------|--------|------------|-------|--------------------|---------|
| LED420    | 7W    | 27K    | PAR20            | E26  | 460    | 40°        | 3.39" | 50W                | 1/24    |
| LED430-SN | 11.5W | 27K    | PAR30 Short Neck | E26  | 850    | 40°        | 3.35" | 50W                | 1/24    |
| LED432-LN | 11.5W | 27K    | PAR30 Long Neck  | E26  | 850    | 40°        | 4.61" | 50W                | 1/12    |
| LED438    | 13W   | 27K    | PAR38            | E26  | 1,050  | 40°        | 4.75" | 75W                | 1/12    |
| LED440    | 17W   | 27K    | PAR38            | E26  | 1,300  | 40°        | 4.75" | 90W                | 1/12    |

# LED Lamps

## LED Specialty Lamps



**LED S14  
E26 Base**

LED S14  
2W • 27K • 150lm



Ideal for String Lights

## Applications

Our general purpose household light bulbs will conveniently replace incandescent or compact fluorescent bulbs.

## Specification Features

|                     |  |
|---------------------|--|
| <b>ETL Listing</b>  | Damp Location                                |
| <b>Energy Star</b>  | Approved                                     |
| <b>Uses</b>         | Down lighting, display or accent application |
| <b>Beam Angle</b>   | 40° Uniform Beam Focus                       |
| <b>Start</b>        | Instant on to full brightness                |
| <b>Dimmable</b>     | Full dimming. Long life.                     |
| <b>Light Source</b> | LED Par Lamps 120v                           |
| <b>Rating</b>       | 15,000 hrs.                                  |



**LED G4  
G4 Base**

LED070  
2W • 30K • 160lm

**LED G9  
G9 Base**

LED072  
3W • 30K • 300lm



Ideal for Specialty Chandeliers

DC Supply defines damp locations as an exterior or interior application that is normally or periodically subject to condensation of moisture in, on or adjacent to the luminaire. Locations, such as under canopies, open porches and basements, that are often protected from weather and not subject to saturation with water or other liquids but may be subject to moderate degrees of moisture are considered damp location.

### Ordering Example:

LED070-2W-30K



Intertek



| Prefix | Watts | Kelvin | Bulb Shape | Base | Lumens | Beam Angle | MOL   | Wattage Equivalent | Pkg Qty |
|--------|-------|--------|------------|------|--------|------------|-------|--------------------|---------|
| LEDS14 | 2W    | 27K    | S14        | E26  | 150    | 330°       | 3.69" | 25W                | 1/24    |
| LED070 | 2W    | 30K    | G4         | G4   | 160    | 160°       | 1.75" | 20W                | 1/24    |
| LED072 | 3W    | 30K    | G9         | G9   | 300    | 160°       | 1.75" | 30W                | 1/24    |



# DCLED005

LED 5W PLC Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 5W          |
| <b>Lamp Shape</b>  | PLC         |
| <b>Base</b>        | GU24        |
| <b>Color Temp.</b> | 28K         |
| <b>Lumens</b>      | 450         |
| <b>Beam Angle</b>  | 130°        |
| <b>MOL</b>         | 5.38"       |
| <b>Dimmable</b>    | No          |
| <b>Rated Hrs.</b>  | 50,000 Hrs. |

### Ordering Example:

DCLED005-5W-28K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED005 | 5W      | 28K = 2800°K |         |

# DCLED006

LED 5W PLC Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 5W          |
| <b>Lamp Shape</b>  | PLC         |
| <b>Base</b>        | GU24        |
| <b>Color Temp.</b> | 41K         |
| <b>Lumens</b>      | 450         |
| <b>Beam Angle</b>  | 130°        |
| <b>MOL</b>         | 5.38"       |
| <b>Dimmable</b>    | No          |
| <b>Rated Hrs.</b>  | 50,000 Hrs. |

### Ordering Example:

DCLED006-5W-41K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED006 | 5W      | 41K = 4100°K |         |

# DCLED007

LED 7W PLC Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 7W          |
| <b>Lamp Shape</b>  | PLC         |
| <b>Base</b>        | GU24        |
| <b>Color Temp.</b> | 28K         |
| <b>Lumens</b>      | 700         |
| <b>Beam Angle</b>  | 130°        |
| <b>MOL</b>         | 6.4"        |
| <b>Dimmable</b>    | No          |
| <b>Rated Hrs.</b>  | 50,000 Hrs. |

### Ordering Example:

DCLED007-7W-28K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED007 | 7W      | 28K = 2800°K |         |

# DCLED008

LED 7W PLC Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 7W          |
| <b>Lamp Shape</b>  | PLC         |
| <b>Base</b>        | GU24        |
| <b>Color Temp.</b> | 41K         |
| <b>Lumens</b>      | 700         |
| <b>Beam Angle</b>  | 130°        |
| <b>MOL</b>         | 6.4"        |
| <b>Dimmable</b>    | No          |
| <b>Rated Hrs.</b>  | 50,000 Hrs. |

### Ordering Example:

DCLED008-7W-41K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED008 | 7W      | 41K = 4100°K |         |

# DCLED010

LED 5W PLC Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 5W          |
| <b>Lamp Shape</b>  | PLC         |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 28K         |
| <b>Lumens</b>      | 450         |
| <b>Beam Angle</b>  | 130°        |
| <b>MOL</b>         | 5.38"       |
| <b>Dimmable</b>    | No          |
| <b>Rated Hrs.</b>  | 50,000 Hrs. |

### Ordering Example:


DCLED010-5W-28K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED010 | 5W      | 28K = 2800°K |         |

# DCLED012

LED 5W PLC Lamp

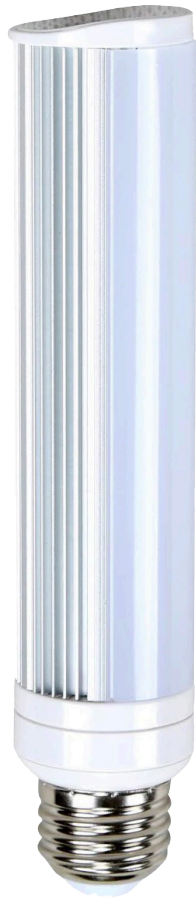

## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 5W          |
| <b>Lamp Shape</b>  | PLC         |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 41K         |
| <b>Lumens</b>      | 450         |
| <b>Beam Angle</b>  | 130°        |
| <b>MOL</b>         | 5.38"       |
| <b>Dimmable</b>    | No          |
| <b>Rated Hrs.</b>  | 50,000 Hrs. |

### Ordering Example:

DCLED012-5W-41K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED012 | 5W      | 41K = 4100°K |         |

# DCLED014

LED 5W PLC Lamp



## Specification Features

|                    |                 |
|--------------------|-----------------|
| <b>Wattage</b>     | 5W              |
| <b>Lamp Shape</b>  | PLC             |
| <b>Base</b>        | G23/GX23 Bi-Pin |
| <b>Color Temp.</b> | 28K             |
| <b>Lumens</b>      | 450             |
| <b>Beam Angle</b>  | 130°            |
| <b>MOL</b>         | 5.79"           |
| <b>Dimmable</b>    | No              |
| <b>Rated Hrs.</b>  | 50,000 Hrs.     |

### Ordering Example:

DCLED014-5W-28K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED014 | 5W      | 28K = 2800°K |         |

# DCLED016

LED 5W PLC Lamp



## Specification Features

|                    |                 |
|--------------------|-----------------|
| <b>Wattage</b>     | 5W              |
| <b>Lamp Shape</b>  | PLC             |
| <b>Base</b>        | G23/GX23 Bi-Pin |
| <b>Color Temp.</b> | 41K             |
| <b>Lumens</b>      | 450             |
| <b>Beam Angle</b>  | 130°            |
| <b>MOL</b>         | 5.79"           |
| <b>Dimmable</b>    | No              |
| <b>Rated Hrs.</b>  | 50,000 Hrs.     |

### Ordering Example:

DCLED016-5W-41K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED016 | 5W      | 41K = 4100°K |         |



# DCLED018

LED 5W PLC Lamp



## Specification Features

|                    |                 |
|--------------------|-----------------|
| <b>Wattage</b>     | 5W              |
| <b>Lamp Shape</b>  | PLC             |
| <b>Base</b>        | G24/GX24 Bi-Pin |
| <b>Color Temp.</b> | 28K             |
| <b>Lumens</b>      | 450             |
| <b>Beam Angle</b>  | 130°            |
| <b>MOL</b>         | 5.79"           |
| <b>Dimmable</b>    | No              |
| <b>Rated Hrs.</b>  | 50,000 Hrs.     |

### Ordering Example:

DCLED018-5W-28K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED018 | 5W      | 28K = 2800°K |         |

# DCLED019

LED 5W PLC Lamp



## Specification Features

|                    |                 |
|--------------------|-----------------|
| <b>Wattage</b>     | 5W              |
| <b>Lamp Shape</b>  | PLC             |
| <b>Base</b>        | G24/GX24 Bi-Pin |
| <b>Color Temp.</b> | 41K             |
| <b>Lumens</b>      | 450             |
| <b>Beam Angle</b>  | 130°            |
| <b>MOL</b>         | 5.79"           |
| <b>Dimmable</b>    | No              |
| <b>Rated Hrs.</b>  | 50,000 Hrs.     |

### Ordering Example:


DCLED019-5W-41K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED019 | 5W      | 41K = 4100°K |         |

# DCLED020

LED 2.5W Filament Candelabra

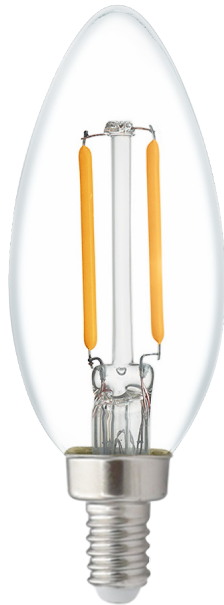

## Specification Features

|                    |                |
|--------------------|----------------|
| <b>Wattage</b>     | 2.5W           |
| <b>Lamp Shape</b>  | B11 Torpedo    |
| <b>Base</b>        | E12 Candelabra |
| <b>Color Temp.</b> | 27K            |
| <b>Lumens</b>      | 230            |
| <b>Beam Angle</b>  | 330°           |
| <b>MOL</b>         | 3.65"          |
| <b>Dimmable</b>    | 0-10v          |
| <b>Rated Hrs.</b>  | 15,000 Hrs.    |

### Ordering Example:

DCLED020-2.5W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED020 | 2.5W    | 27K = 2700°K |         |

# DCLED022

LED 2.5W Filament Candelabra



## Specification Features

|                    |                |
|--------------------|----------------|
| <b>Wattage</b>     | 2.5W           |
| <b>Lamp Shape</b>  | B11 Flame Tip  |
| <b>Base</b>        | E12 Candelabra |
| <b>Color Temp.</b> | 27K            |
| <b>Lumens</b>      | 230            |
| <b>Beam Angle</b>  | 330°           |
| <b>MOL</b>         | 4.76"          |
| <b>Dimmable</b>    | 0-10v          |
| <b>Rated Hrs.</b>  | 15,000 Hrs.    |

### Ordering Example:

DCLED022-2.5W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED022 | 2.5W    | 27K = 2700°K |         |

# DCLED024

LED 3W Filament Candelabra



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 3W          |
| <b>Lamp Shape</b>  | B11 Torpedo |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 310         |
| <b>Beam Angle</b>  | 330°        |
| <b>MOL</b>         | 3.65"       |
| <b>Dimmable</b>    | 0-10v       |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED024-3W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED024 | 3W      | 27K = 2700°K |         |

# DCLED026

LED 3W Filament Candelabra



## Specification Features

|                    |               |
|--------------------|---------------|
| <b>Wattage</b>     | 3W            |
| <b>Lamp Shape</b>  | B11 Flame Tip |
| <b>Base</b>        | E26 Medium    |
| <b>Color Temp.</b> | 27K           |
| <b>Lumens</b>      | 310           |
| <b>Beam Angle</b>  | 330°          |
| <b>MOL</b>         | 4.76"         |
| <b>Dimmable</b>    | 0-10v         |
| <b>Rated Hrs.</b>  | 15,000 Hrs.   |

### Ordering Example:

DCLED026-3W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED026 | 3W      | 27K = 2700°K |         |

# DCLED052

LED 7W Filament



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 7W          |
| <b>Lamp Shape</b>  | A19         |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 800         |
| <b>Beam Angle</b>  | 330°        |
| <b>MOL</b>         | 4.02"       |
| <b>Dimmable</b>    | 0-10v       |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

**Ordering Example:**  
DCLED052-7W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED052 | 7W      | 27K = 2700°K |         |

# DCLED054

LED 12W Filament



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 12W         |
| <b>Lamp Shape</b>  | A21         |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 1100        |
| <b>Beam Angle</b>  | 330°        |
| <b>MOL</b>         | 5.27"       |
| <b>Dimmable</b>    | 0-10v       |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED054-12W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED054 | 12W     | 27K = 2700°K |         |



# DCLED056

LED 4W Filament



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 4W          |
| <b>Lamp Shape</b>  | T10         |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 420         |
| <b>Beam Angle</b>  | 330°        |
| <b>MOL</b>         | 5.12"       |
| <b>Dimmable</b>    | 0-10v       |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED056-4W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED056 | 4W      | 27K = 2700°K |         |

# DCLED058

LED 7W Filament



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 7W          |
| <b>Lamp Shape</b>  | ST19        |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 800         |
| <b>Beam Angle</b>  | 330°        |
| <b>MOL</b>         | 5.51"       |
| <b>Dimmable</b>    | 0-10v       |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED058-7W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED058 | 7W      | 27K = 2700°K |         |

# DCLED060

LED 5W B11 Flame Tip Lamp



## Specification Features

|                    |                |
|--------------------|----------------|
| <b>Wattage</b>     | 5W             |
| <b>Lamp Shape</b>  | B11 Flame Tip  |
| <b>Base</b>        | E12 Candelabra |
| <b>Color Temp.</b> | 27K            |
| <b>Lumens</b>      | 350            |
| <b>Beam Angle</b>  | 40°            |
| <b>MOL</b>         | 3.78"          |
| <b>Dimmable</b>    | 0-10v          |
| <b>Rated Hrs.</b>  | 15,000 Hrs.    |

### Ordering Example:

DCLED060-5W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED060 | 5W      | 27K = 2700°K |         |

# DCLED062

LED 5W B11 Flame Tip Lamp



## Specification Features

|                    |               |
|--------------------|---------------|
| <b>Wattage</b>     | 5W            |
| <b>Lamp Shape</b>  | B11 Flame Tip |
| <b>Base</b>        | E26 Medium    |
| <b>Color Temp.</b> | 27K           |
| <b>Lumens</b>      | 350           |
| <b>Beam Angle</b>  | 40°           |
| <b>MOL</b>         | 3.78"         |
| <b>Dimmable</b>    | 0-10v         |
| <b>Rated Hrs.</b>  | 15,000 Hrs.   |

### Ordering Example:

DCLED062-5W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED062 | 5W      | 27K = 2700°K |         |

# DCLED064

LED 7W G25 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 7W          |
| <b>Lamp Shape</b>  | G25         |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 500         |
| <b>Beam Angle</b>  | 110°        |
| <b>MOL</b>         | 4.25"       |
| <b>Dimmable</b>    | 0-10v       |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED064-7W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED064 | 7W      | 27K = 2700°K |         |

# DCLED066

LED 6W MR16 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 6W          |
| <b>Lamp Shape</b>  | MR16        |
| <b>Base</b>        | GU10        |
| <b>Color Temp.</b> | 30K         |
| <b>Lumens</b>      | 450         |
| <b>Beam Angle</b>  | 40°         |
| <b>MOL</b>         | 2"          |
| <b>Dimmable</b>    | 0-10v       |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED066-6W-30K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED066 | 6W      | 30K = 3000°K |         |

# DCLED068

LED 6W MR16 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 6W          |
| <b>Lamp Shape</b>  | MR16        |
| <b>Base</b>        | GU5.3       |
| <b>Color Temp.</b> | 30K         |
| <b>Lumens</b>      | 400         |
| <b>Beam Angle</b>  | 40°         |
| <b>MOL</b>         | 2"          |
| <b>Dimmable</b>    | 0-10v       |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED068-6W-30K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED068 | 6W      | 30K = 3000°K |         |

# DCLED070

LED 2.5W Mini G4 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 2.5W        |
| <b>Lamp Shape</b>  | Miniature   |
| <b>Base</b>        | G4          |
| <b>Color Temp.</b> | 30K         |
| <b>Lumens</b>      | 200         |
| <b>Beam Angle</b>  | 150°        |
| <b>MOL</b>         | 1.5"        |
| <b>Dimmable</b>    | No          |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED070-2.5W-30K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED070 | 2.5W    | 30K = 3000°K |         |



# DCLED072

LED 2.5W Mini G9 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 2.5W        |
| <b>Lamp Shape</b>  | Miniature   |
| <b>Base</b>        | G9          |
| <b>Color Temp.</b> | 30K         |
| <b>Lumens</b>      | 200         |
| <b>Beam Angle</b>  | 150°        |
| <b>MOL</b>         | 2"          |
| <b>Dimmable</b>    | No          |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED072-2.5W-30K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED072 | 2.5W    | 30K = 3000°K |         |

# DCLED120

LED 4W Filament



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 4W          |
| <b>Lamp Shape</b>  | G25         |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 420         |
| <b>Beam Angle</b>  | 330°        |
| <b>MOL</b>         | 4.13"       |
| <b>Dimmable</b>    | 0-10v       |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED120-4W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED120 | 4W      | 27K = 2700°K |         |

# DCLED136

LED 7W Filament Globe



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 7W          |
| <b>Lamp Shape</b>  | G40         |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 800         |
| <b>Beam Angle</b>  | 330°        |
| <b>MOL</b>         | 6.61"       |
| <b>Dimmable</b>    | 0-10v       |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED136-7W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED136 | 7W      | 27K = 2700°K |         |

# DCLED210

LED 5.5W A15 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 5.5W        |
| <b>Lamp Shape</b>  | A15         |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 600         |
| <b>Beam Angle</b>  | 240°        |
| <b>MOL</b>         | 3.48"       |
| <b>Dimmable</b>    | No          |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED210-5.5W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED210 | 5.5W    | 27K = 2700°K |         |

# DCLED214

LED 5.5W A15 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 5.5W        |
| <b>Lamp Shape</b>  | A15         |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 41K         |
| <b>Lumens</b>      | 600         |
| <b>Beam Angle</b>  | 240°        |
| <b>MOL</b>         | 3.48"       |
| <b>Dimmable</b>    | No          |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED214-5.5W-41K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED214 | 5.5W    | 41K = 4100°K |         |

# DCLED320

LED 6.5W BR20 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 6.5W        |
| <b>Lamp Shape</b>  | BR20        |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 460         |
| <b>Beam Angle</b>  | 110°        |
| <b>MOL</b>         | 3.8"        |
| <b>Dimmable</b>    | 0-10v       |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED320-6.5W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED320 | 6.5W    | 27K = 2700°K |         |

# DCLED330

LED 9W BR30 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 9W          |
| <b>Lamp Shape</b>  | BR30        |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 650         |
| <b>Beam Angle</b>  | 110°        |
| <b>MOL</b>         | 5"          |
| <b>Dimmable</b>    | 0-10v       |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED330-9W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED330 | 9W      | 27K = 2700°K |         |

# DCLED340

LED 13W BR40 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 13W         |
| <b>Lamp Shape</b>  | BR40        |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 1,050       |
| <b>Beam Angle</b>  | 110°        |
| <b>MOL</b>         | 6.46"       |
| <b>Dimmable</b>    | 0-10v       |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED340-13W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED340 | 13W     | 27K = 2700°K |         |



# DCLED420

LED 7W PAR20 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 7W          |
| <b>Lamp Shape</b>  | PAR20       |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 460         |
| <b>Beam Angle</b>  | 40°         |
| <b>MOL</b>         | 3.39"       |
| <b>Dimmable</b>    | 0-10v       |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED420-7W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED420 | 7W      | 27K = 2700°K |         |

# DCLED430-SN

LED 11.5W Short Neck PAR 30 Lamp



## Specification Features

|                    |                   |
|--------------------|-------------------|
| <b>Wattage</b>     | 11.5W             |
| <b>Lamp Shape</b>  | Short Neck PAR 30 |
| <b>Base</b>        | E26 Medium        |
| <b>Color Temp.</b> | 27K               |
| <b>Lumens</b>      | 850               |
| <b>Beam Angle</b>  | 40°               |
| <b>MOL</b>         | 3.35"             |
| <b>Dimmable</b>    | 0-10v             |
| <b>Rated Hrs.</b>  | 15,000 Hrs.       |

**Ordering Example:**  
DCLED430-SN-11.5W-27K



| Prefix      | Wattage | Kelvin/CCT   | Options |
|-------------|---------|--------------|---------|
| DCLED430-SN | 11.5W   | 27K = 2700°K |         |

# DCLED432-LN

LED 11.5W Long Neck PAR 30 Lamp



## Specification Features

|                    |                  |
|--------------------|------------------|
| <b>Wattage</b>     | 11.5W            |
| <b>Lamp Shape</b>  | Long Neck PAR 30 |
| <b>Base</b>        | E26 Medium       |
| <b>Color Temp.</b> | 27K              |
| <b>Lumens</b>      | 850              |
| <b>Beam Angle</b>  | 40°              |
| <b>MOL</b>         | 4.61"            |
| <b>Dimmable</b>    | 0-10v            |
| <b>Rated Hrs.</b>  | 15,000 Hrs.      |

**Ordering Example:**  
DCLED432-LN-11.5W-27K



| Prefix      | Wattage | Kelvin/CCT   | Options |
|-------------|---------|--------------|---------|
| DCLED432-LN | 11.5W   | 27K = 2700°K |         |

# DCLED438

LED 13W PAR 38 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 13W         |
| <b>Lamp Shape</b>  | PAR 38      |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 1,050       |
| <b>Beam Angle</b>  | 40°         |
| <b>MOL</b>         | 4.75"       |
| <b>Dimmable</b>    | 0-10v       |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED438-13W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED438 | 13W     | 27K = 2700°K |         |

# DCLED440

LED 17W PAR 38 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 17W         |
| <b>Lamp Shape</b>  | PAR 38      |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 1,300       |
| <b>Beam Angle</b>  | 40°         |
| <b>MOL</b>         | 4.75"       |
| <b>Dimmable</b>    | 0-10v       |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLED440-17W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLED440 | 17W     | 27K = 2700°K |         |

# DCLEDA102

LED 5W A19 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 5W          |
| <b>Lamp Shape</b>  | A19         |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 450         |
| <b>Beam Angle</b>  | 240°        |
| <b>MOL</b>         | 4.25"       |
| <b>Dimmable</b>    | No          |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLEDA102-5W-27K



| Prefix    | Wattage | Kelvin/CCT   | Options |
|-----------|---------|--------------|---------|
| DCLEDA102 | 5W      | 27K = 2700°K |         |

# DCLEDA104

LED 5W A19 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 5W          |
| <b>Lamp Shape</b>  | A19         |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 41K         |
| <b>Lumens</b>      | 450         |
| <b>Beam Angle</b>  | 240°        |
| <b>MOL</b>         | 4.25"       |
| <b>Dimmable</b>    | No          |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

**Ordering Example:**  
DCLEDA104-5W-41K



| Prefix    | Wattage | Kelvin/CCT   | Options |
|-----------|---------|--------------|---------|
| DCLEDA104 | 5W      | 41K = 4100°K |         |

# DCLEDA106

LED 5W A19 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 5W          |
| <b>Lamp Shape</b>  | A19         |
| <b>Base</b>        | GU24 Bi-Pin |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 450         |
| <b>Beam Angle</b>  | 240°        |
| <b>MOL</b>         | 4.25"       |
| <b>Dimmable</b>    | No          |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLEDA106-5W-27K



| Prefix    | Wattage | Kelvin/CCT   | Options |
|-----------|---------|--------------|---------|
| DCLEDA106 | 5W      | 27K = 2700°K |         |



# DCLEDA108

LED 5W A19 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 5W          |
| <b>Lamp Shape</b>  | A19         |
| <b>Base</b>        | GU24 Bi-Pin |
| <b>Color Temp.</b> | 41K         |
| <b>Lumens</b>      | 450         |
| <b>Beam Angle</b>  | 240°        |
| <b>MOL</b>         | 4.25"       |
| <b>Dimmable</b>    | No          |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLEDA108-5W-41K



| Prefix    | Wattage | Kelvin/CCT   | Options |
|-----------|---------|--------------|---------|
| DCLEDA108 | 5W      | 41K = 4100°K |         |

# DCLEDA110

LED 9W A19 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 9W          |
| <b>Lamp Shape</b>  | A19         |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 800         |
| <b>Beam Angle</b>  | 240°        |
| <b>MOL</b>         | 4.25"       |
| <b>Dimmable</b>    | No          |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLEDA110-9W-27K



| Prefix    | Wattage | Kelvin/CCT   | Options |
|-----------|---------|--------------|---------|
| DCLEDA110 | 9W      | 27K = 2700°K |         |

# DCLEDA112

LED 9W A19 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 9W          |
| <b>Lamp Shape</b>  | A19         |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 41K         |
| <b>Lumens</b>      | 800         |
| <b>Beam Angle</b>  | 240°        |
| <b>MOL</b>         | 4.25"       |
| <b>Dimmable</b>    | No          |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLEDA112-9W-41K



| Prefix    | Wattage | Kelvin/CCT   | Options |
|-----------|---------|--------------|---------|
| DCLEDA112 | 9W      | 41K = 4100°K |         |

# DCLEDA114

LED 9W A19 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 9W          |
| <b>Lamp Shape</b>  | A19         |
| <b>Base</b>        | GU24 Bi-Pin |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 800         |
| <b>Beam Angle</b>  | 240°        |
| <b>MOL</b>         | 4.25"       |
| <b>Dimmable</b>    | No          |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLEDA114-9W-27K



| Prefix    | Wattage | Kelvin/CCT   | Options |
|-----------|---------|--------------|---------|
| DCLEDA114 | 9W      | 27K = 2700°K |         |

# DCLEDA116

LED 9W A19 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 9W          |
| <b>Lamp Shape</b>  | A19         |
| <b>Base</b>        | GU24 Bi-Pin |
| <b>Color Temp.</b> | 41K         |
| <b>Lumens</b>      | 800         |
| <b>Beam Angle</b>  | 240°        |
| <b>MOL</b>         | 4.25"       |
| <b>Dimmable</b>    | No          |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLEDA116-9W-41K



| Prefix    | Wattage | Kelvin/CCT   | Options |
|-----------|---------|--------------|---------|
| DCLEDA116 | 9W      | 41K = 4100°K |         |

# DCLEDS14

LED 2W Filament S14 Lamp



## Specification Features

|                    |             |
|--------------------|-------------|
| <b>Wattage</b>     | 2W          |
| <b>Lamp Shape</b>  | S14         |
| <b>Base</b>        | E26 Medium  |
| <b>Color Temp.</b> | 27K         |
| <b>Lumens</b>      | 150         |
| <b>Beam Angle</b>  | 330°        |
| <b>MOL</b>         | 3.69"       |
| <b>Dimmable</b>    | 0-10v       |
| <b>Rated Hrs.</b>  | 15,000 Hrs. |

### Ordering Example:

DCLEDS14-2W-27K



| Prefix   | Wattage | Kelvin/CCT   | Options |
|----------|---------|--------------|---------|
| DCLEDS14 | 2W      | 27K = 2700°K |         |

# DCLEDT800

LED 9W 24" Tube Lamp



## Specification Features

|                    |                   |
|--------------------|-------------------|
| <b>Wattage</b>     | 9W                |
| <b>Lamp Shape</b>  | T8 Tube           |
| <b>Base</b>        | G13 Medium Bi-Pin |
| <b>Color Temp.</b> | 30K               |
| <b>Lumens</b>      | 900               |
| <b>Beam Angle</b>  | 300°              |
| <b>Length</b>      | 24"               |
| <b>Dimmable</b>    | No                |
| <b>Rated Hrs.</b>  | 50,000 Hrs.       |

### Ordering Example:

DCLEDT800-9W-30K



| Prefix    | Wattage | Kelvin/CCT   | Options |
|-----------|---------|--------------|---------|
| DCLEDT800 | 9W      | 30K = 3000°K |         |

# DCLEDT801

LED 18W 48" Tube Lamp



## Specification Features

|                    |                   |
|--------------------|-------------------|
| <b>Wattage</b>     | 18W               |
| <b>Lamp Shape</b>  | T8 Tube           |
| <b>Base</b>        | G13 Medium Bi-Pin |
| <b>Color Temp.</b> | 30K               |
| <b>Lumens</b>      | 1,800             |
| <b>Beam Angle</b>  | 300°              |
| <b>Length</b>      | 48"               |
| <b>Dimmable</b>    | No                |
| <b>Rated Hrs.</b>  | 50,000 Hrs.       |

### Ordering Example:

DCLEDT801-18W-30K



| Prefix    | Wattage | Kelvin/CCT   | Options |
|-----------|---------|--------------|---------|
| DCLEDT801 | 18W     | 30K = 3000°K |         |



# DCLEDT802

LED 9W 24" Tube Lamp



## Specification Features

|                    |                   |
|--------------------|-------------------|
| <b>Wattage</b>     | 9W                |
| <b>Lamp Shape</b>  | T8 Tube           |
| <b>Base</b>        | G13 Medium Bi-Pin |
| <b>Color Temp.</b> | 40K               |
| <b>Lumens</b>      | 900               |
| <b>Beam Angle</b>  | 300°              |
| <b>Length</b>      | 24"               |
| <b>Dimmable</b>    | No                |
| <b>Rated Hrs.</b>  | 50,000 Hrs.       |

### Ordering Example:

DCLEDT802-9W-40K



| Prefix    | Wattage | Kelvin/CCT   | Options |
|-----------|---------|--------------|---------|
| DCLEDT802 | 9W      | 40K = 4000°K |         |

# DCLEDT803

LED 9W 24" Tube Lamp



## Specification Features

|                    |                   |
|--------------------|-------------------|
| <b>Wattage</b>     | 9W                |
| <b>Lamp Shape</b>  | T8 Tube           |
| <b>Base</b>        | G13 Medium Bi-Pin |
| <b>Color Temp.</b> | 50K               |
| <b>Lumens</b>      | 900               |
| <b>Beam Angle</b>  | 300°              |
| <b>Length</b>      | 24"               |
| <b>Dimmable</b>    | No                |
| <b>Rated Hrs.</b>  | 50,000 Hrs.       |

### Ordering Example:

DCLEDT803-9W-50K



| Prefix    | Wattage | Kelvin/CCT   | Options |
|-----------|---------|--------------|---------|
| DCLEDT803 | 9W      | 50K = 5000°K |         |

# DCLEDT804

LED 18W 48" Tube Lamp



## Specification Features

|                    |                   |
|--------------------|-------------------|
| <b>Wattage</b>     | 18W               |
| <b>Lamp Shape</b>  | T8 Tube           |
| <b>Base</b>        | G13 Medium Bi-Pin |
| <b>Color Temp.</b> | 40K               |
| <b>Lumens</b>      | 1,800             |
| <b>Beam Angle</b>  | 300°              |
| <b>Length</b>      | 48"               |
| <b>Dimmable</b>    | No                |
| <b>Rated Hrs.</b>  | 50,000 Hrs.       |

### Ordering Example:

DCLEDT804-18W-40K



| Prefix    | Wattage | Kelvin/CCT   | Options |
|-----------|---------|--------------|---------|
| DCLEDT804 | 18W     | 40K = 4000°K |         |

# DCLEDT805

LED 18W 48" Tube Lamp



## Specification Features

|                    |                   |
|--------------------|-------------------|
| <b>Wattage</b>     | 18W               |
| <b>Lamp Shape</b>  | T8 Tube           |
| <b>Base</b>        | G13 Medium Bi-Pin |
| <b>Color Temp.</b> | 50K               |
| <b>Lumens</b>      | 1,800             |
| <b>Beam Angle</b>  | 300°              |
| <b>Length</b>      | 48"               |
| <b>Dimmable</b>    | No                |
| <b>Rated Hrs.</b>  | 50,000 Hrs.       |

### Ordering Example:

DCLEDT805-18W-50K



| Prefix    | Wattage | Kelvin/CCT   | Options |
|-----------|---------|--------------|---------|
| DCLEDT805 | 18W     | 50K = 5000°K |         |